

klu9.clo

Kluwer Academic Publishers

1998/02/11

Abstract. This internal file takes care of list definitions and ‘general’ point size options.

Table of Contents

1	Implementation	2
1.1	Section size commands	2
1.2	Various values	2
1.3	Textheight and textwidth	3
1.4	Lists	4
1.5	Float separation parameters	5



1. Implementation

```
1 \ProvidesFile{klu9.clo}[\filedate ]
```

1.1. SECTION SIZE COMMANDS

added command: `\little`. This is identical to `\tiny` here. Allowed type provided values: 5/6, 6/7, 7/8, 8/9.5, 9/11, 10/12, 11/13, 12/14, 14/18, 17/22, 20/25.

```
2 \renewcommand\normalsize{%
3   \@setfontsize\normalsize\@ixpt{11}%
4   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
5   \abovedisplayskip \z@ \@plus2\p@
6   \belowdisplayskip 4\p@ \@plus2\p@ \@minus2\p@
7   \belowdisplayskip \abovedisplayskip
8   \let\listi\@listI}
9 \normalsize
10 \newcommand\small{%
11   \@setfontsize\small\@viipt{9.5}%
12   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
13   \abovedisplayskip \z@ \@plus\p@
14   \belowdisplayskip 3\p@ \@plus\p@ \@minus2\p@
15   \def\@listi{\leftmargin\leftmargini
16     \topsep 3\p@ \@plus\p@ \@minus\p@
17     \parsep 2\p@ \@plus\p@ \@minus\p@
18     \itemsep \parsep}%
19   \belowdisplayskip \abovedisplayskip
20 }
21 \newcommand\footnotesize{%
22   \@setfontsize\footnotesize\@viipt{8}%
23   \abovedisplayskip 4\p@ \@plus2\p@ \@minus2\p@
24   \abovedisplayskip \z@ \@plus\p@
25   \belowdisplayskip 2\p@ \@plus\p@ \@minus1\p@
26   \def\@listi{\leftmargin\leftmargini
27     \topsep 2\p@ \@plus\p@ \@minus\p@
28     \parsep 1\p@ \@plus\p@ \@minus\p@
29     \itemsep \parsep}%
30   \belowdisplayskip \abovedisplayskip
31 }
32 \newcommand\scriptsize{\@setfontsize\scriptsize\@vpt\@viipt}
33 \newcommand\little{\@setfontsize\little\@vpt\@viipt}
34 \newcommand\tiny{\@setfontsize\tiny\@vpt\@viipt}
35 \newcommand\large{\@setfontsize\large\@xpt\@xipt}
36 \newcommand\Large{\@setfontsize\Large\@xipt{14}}
37 \newcommand\LARGE{\@setfontsize\LARGE\@xivpt{18}}
38 \newcommand\huge{\@setfontsize\huge\@xxvpt{22}}
39 \newcommand\Huge{\@setfontsize\Huge\@xxpt{25}}
```

1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
40 \setlength\hoffset{-1in}
41 \setlength\voffset{-1in}
42 \setlength\parindent {14\p@}
43 \setlength\headheight{12\p@}
```

```

44 \setlength\headsep {12\p0}
45 \setlength\topskip {10\p0}
46 \setlength\footskip {25\p0}
47 \setlength\marginparsep{10pt}
48 \setlength\marginparpush{5\p0}
49 \setlength\maxdepth {1.5\topskip}
50 \setlength\@maxdepth\maxdepth
51 \setlength\columnsep{10pt}
52 \setlength\columnseprule{0pt}
53 \setlength\fbboxsep{3pt}
54 \setlength\fbboxrule{.4pt}

```

1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, $\text{\LaTeX}$ calculates `textwidth` out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The 2pc value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```

55 \newdimen\id@boxheight
56 \AtBeginDocument{%
57   \setlength\@tempdima{\paperwidth}%
58   \addtolength\@tempdima{-\textwidth}%
59   \divide\@tempdima by 2
60   \setlength\@tempdimb\marginparwidth
61   \addtolength\@tempdimb\marginparsep
62   \addtolength\@tempdimb{2pc}%
63   \ifdim \@tempdima <\@tempdimb
64     \settopoint\@tempdimb
65     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{-}{You made
66     your \string\textwidth\space (\the\textwidth) and
67     \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
68     The allowed value for margin space: (\the\@tempdima). Needed value:
69     (\the\@tempdimb).\MessageBreak
70     This is not enough,
71     so I will set \string\marginparwidth\space to 0pt.\MessageBreak
72     Let's hope that fixes it.
73   }%
74   \marginparwidth \z@
75   \marginparsep \z@
76 \fi
77 \ifdim \@tempdima <2pc
78   \@tempdimb=\paperwidth
79   \advance\@tempdimb by -4pc
80   \settopoint\@tempdimb
81   \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{-}{You
82   made your \string\textwidth\space (\the\textwidth)
83   wider than the available total\MessageBreak
84   (Which is: \the\@tempdimb). Please press X and try again.
85   }%
86 \fi
87 \oddsidemargin \@tempdima
88 \evensidemargin \@tempdima

```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```

89 \setlength\@tempdima{\paperheight}
90 \addtolength\@tempdima{-\footskip}
91 \addtolength\@tempdima{-\headheight}
92 \addtolength\@tempdima{-\headsep}
93 \setlength\@tempdimb{\@tempdima}
94 \addtolength\@tempdima{-\textheight}
95 \divide\@tempdima by 2
96 \ifdim \@tempdima <2pc
97 \advance\@tempdimb by -4pc
98 \@settopoint\@tempdimb
99 \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{\You
100 made your \string\textheight\space (\the\textheight)
101 more than the available total.\MessageBreak
102 (Which is: \the\@tempdimb). Please press X and try again.
103 }%
104 \fi
105 \setlength\topmargin{\@tempdima}
106 \setlength\id@boxheight{\@tempdima}
107 \advance\id@boxheight by -2pc
108 }

109 \setlength\footnotesep{6\p@}
110 \setlength\skip\footins{9\p@ \@plus 4\p@ \@minus 2\p@}

```

1.4. LISTS

List default values

```

111 \setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
112 \setlength\leftmargini{1.9em}
113 \setlength\leftmarginii{2em}
114 \setlength\leftmarginiii{1.7em}
115 \setlength\leftmarginiv{1.4em}
116 \setlength\leftmarginv{1em}
117 \setlength\leftmarginvi{1em}
118 \setlength\labelsep{.4em}
119 \setlength\labelwidth{\leftmargini}
120 \addtolength\labelwidth{-\labelsep}

```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```

121 \def\listI{%
122 \leftmargin \leftmargini
123 \topsep 8\p@ \@plus 2\p@ \@minus 2\p@
124 \partopsep 2\p@ \@plus 1\p@ \@minus 1\p@
125 \itemsep 4\p@ \@plus 2\p@ \@minus 1\p@
126 \parsep 4\p@ \@plus 2\p@ \@minus 1\p@ }
127 \def\listii{%
128 \leftmargin \leftmarginii
129 \labelwidth \leftmarginii
130 \advance\labelwidth by -\labelsep
131 \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
132 \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
133 \itemsep \parsep}

```

```

134 \def\@listiii{%
135   \leftmargin \leftmarginiii
136   \labelwidth \leftmarginiii
137   \advance\labelwidth by -\labelsep
138   \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
139   \parsep \z@
140   \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
141   \itemsep \topsep}
142 \def\@listiv{%
143   \setlength{\leftmargin}{\leftmarginiv}%
144   \setlength{\labelwidth}{\leftmarginiv}%
145   \addtolength{\labelwidth}{-\labelsep}}
146 \def\@listv{%
147   \setlength{\leftmargin}{\leftmarginv}%
148   \setlength{\labelwidth}{\leftmarginv}%
149   \addtolength{\labelwidth}{-\labelsep}}
150 \def\@listvi{%
151   \setlength{\leftmargin}{\leftmarginvi}%
152   \setlength{\labelwidth}{\leftmarginvi}%
153   \addtolength{\labelwidth}{-\labelsep}}
154 \let\@listi\@listI
155 \@listi

```

1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```

156 \setlength\floatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
157 \setlength\textfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}
158 \setlength\intextsep{10\p@ \@plus 2\p@ \@minus 2\p@}
159 \setlength\dblfloatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
160 \setlength\dbltextfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}

```

Separation on float pages

```

161 \setlength\@fptop{0\p@ \@plus 1fil}
162 \setlength\@fpsep{8\p@ \@plus 2fil}
163 \setlength\@fpbot{0\p@ \@plus 1fil}
164 \setlength\@dblftop{0\p@ \@plus 1fil}
165 \setlength\@dblfpsep{8\p@ \@plus 2fil}
166 \setlength\@dblfpbot{0\p@ \@plus 1fil}
167
168 \endinput

```

klut9.clo

Kluwer Academic Publishers

1998/02/11

Abstract. This internal file takes care of list definitions and ‘general’ point size options. This is a ‘tight’ file.

Table of Contents

1	Implementation	2
1.1	Section size commands	2
1.2	Various values	2
1.3	Textheight and textwidth	3
1.4	Lists	4
1.5	Float separation parameters	5



1. Implementation

```
1 \ProvidesFile{klut9.clo}[\filedate ]
```

1.1. SECTION SIZE COMMANDS

added command: `\little`. This is identical to `\tiny` here. Allowed type provided values: 5/6, 6/7, 7/8, 8/9, 9/10.5, 10/11.5, 11/13, 12/14, 14/18, 17/22, 20/25.

```
2 \renewcommand\normalsize{%
3   \@setfontsize\normalsize\@ixpt{10.5}%
4   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
5   \abovedisplaysshortskip \z@ \@plus2\p@
6   \belowdisplaysshortskip 4\p@ \@plus2\p@ \@minus2\p@
7   \belowdisplayskip \abovedisplayskip
8   \let\listi\@listI}
9 \normalsize
10 \newcommand\small{%
11   \@setfontsize\small\@viipt{9}%
12   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
13   \abovedisplaysshortskip \z@ \@plus\p@
14   \belowdisplaysshortskip 3\p@ \@plus\p@ \@minus2\p@
15   \def\@listi{\leftmargin\leftmargini
16             \topsep 3\p@ \@plus\p@ \@minus\p@
17             \parsep 2\p@ \@plus\p@ \@minus\p@
18             \itemsep \parsep}%
19   \belowdisplayskip \abovedisplayskip
20 }
21 \newcommand\footnotesize{%
22   \@setfontsize\footnotesize\@viipt{8}%
23   \abovedisplayskip 4\p@ \@plus2\p@ \@minus2\p@
24   \abovedisplaysshortskip \z@ \@plus\p@
25   \belowdisplaysshortskip 2\p@ \@plus\p@ \@minus1\p@
26   \def\@listi{\leftmargin\leftmargini
27             \topsep 2\p@ \@plus\p@ \@minus\p@
28             \parsep 1\p@ \@plus\p@ \@minus\p@
29             \itemsep \parsep}%
30   \belowdisplayskip \abovedisplayskip
31 }
32 \newcommand\scriptsize{\@setfontsize\scriptsize\@vpt\@viipt}
33 \newcommand\little{\@setfontsize\little\@vpt\@viipt}
34 \newcommand\tiny{\@setfontsize\tiny\@vpt\@viipt}
35 \newcommand\large{\@setfontsize\large\@xpt{11.5}}
36 \newcommand\Large{\@setfontsize\Large\@xipt{14}}
37 \newcommand\LARGE{\@setfontsize\LARGE\@xivpt{18}}
38 \newcommand\huge{\@setfontsize\huge\@xxvpt{22}}
39 \newcommand\Huge{\@setfontsize\Huge\@xxpt{25}}
```

1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
40 \setlength\hoffset{-1in}
41 \setlength\voffset{-1in}
42 \setlength\parindent {14\p@}
43 \setlength\headheight{12\p@}
```

```

44 \setlength\headsep {12\p0}
45 \setlength\topskip {10\p0}
46 \setlength\footskip {25\p0}
47 \setlength\marginparsep{10pt}
48 \setlength\marginparpush{5\p0}
49 \setlength\maxdepth {1.5\topskip}
50 \setlength\@maxdepth\maxdepth
51 \setlength\columnsep{10pt}
52 \setlength\columnseprule{0pt}
53 \setlength\fbboxsep{3pt}
54 \setlength\fbboxrule{.4pt}

```

1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, $\text{\LaTeX}$ calculates `textwidth` out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The 2pc value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```

55 \newdimen\id@boxheight
56 \AtBeginDocument{%
57   \setlength\@tempdima{\paperwidth}%
58   \addtolength\@tempdima{-\textwidth}%
59   \divide\@tempdima by 2
60   \setlength\@tempdimb\marginparwidth
61   \addtolength\@tempdimb\marginparsep
62   \addtolength\@tempdimb{2pc}%
63   \ifdim \@tempdima <\@tempdimb
64     \settopoint\@tempdimb
65     \GenericError{Pointsizes}{Pointsizes Error: Marginpars disabled}{}{You made
66     your \string\textwidth\space (\the\textwidth) and
67     \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
68     The allowed value for margin space: (\the\@tempdima). Needed value:
69     (\the\@tempdimb).\MessageBreak
70     This is not enough,
71     so I will set \string\marginparwidth\space to 0pt.\MessageBreak
72     Let's hope that fixes it.
73   }%
74   \marginparwidth \z@
75   \marginparsep \z@
76 \fi
77 \ifdim \@tempdima <2pc
78   \@tempdimb=\paperwidth
79   \advance\@tempdimb by -4pc
80   \settopoint\@tempdimb
81   \GenericError{Pointsizes}{Pointsizes Error: Invalid sizes given}{}{You
82   made your \string\textwidth\space (\the\textwidth)
83   wider than the available total\MessageBreak
84   (Which is: \the\@tempdimb). Please press X and try again.
85   }%
86 \fi
87 \oddsidemargin \@tempdima
88 \evensidemargin \@tempdima

```


These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```

89 \setlength\@tempdima{\paperheight}
90 \addtolength\@tempdima{-\footskip}
91 \addtolength\@tempdima{-\headheight}
92 \addtolength\@tempdima{-\headsep}
93 \setlength\@tempdimb{\@tempdima}
94 \addtolength\@tempdima{-\textheight}
95 \divide\@tempdima by 2
96 \ifdim \@tempdima <2pc
97 \advance\@tempdimb by -4pc
98 \@settopoint\@tempdimb
99 \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{\You
100 made your \string\textheight\space (\the\textheight)
101 more than the available total.\MessageBreak
102 (Which is: \the\@tempdimb). Please press X and try again.
103 }%
104 \fi
105 \setlength\topmargin{\@tempdima}
106 \setlength\id@boxheight{\@tempdima}
107 \advance\id@boxheight by -2pc
108 }

109 \setlength\footnotesep{6\p@}
110 \setlength\skipfootins{9\p@ \@plus 4\p@ \@minus 2\p@}

```

1.4. LISTS

List default values

```

111 \setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
112 \setlength\leftmargini{1.9em}
113 \setlength\leftmarginii{2em}
114 \setlength\leftmarginiii{1.7em}
115 \setlength\leftmarginiv{1.4em}
116 \setlength\leftmarginv{1em}
117 \setlength\leftmarginvi{1em}
118 \setlength\labelsep{.4em}
119 \setlength\labelwidth{\leftmargini}
120 \addtolength\labelwidth{-\labelsep}

```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```

121 \def\listI{%
122 \leftmargin \leftmargini
123 \topsep 8\p@ \@plus 2\p@ \@minus 2\p@
124 \partopsep 2\p@ \@plus 1\p@ \@minus 1\p@
125 \itemsep 4\p@ \@plus 2\p@ \@minus 1\p@
126 \parsep 4\p@ \@plus 2\p@ \@minus 1\p@ }
127 \def\listii{%
128 \leftmargin \leftmarginii
129 \labelwidth \leftmarginii
130 \advance\labelwidth by -\labelsep
131 \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
132 \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
133 \itemsep \parsep}

```

```

134 \def\@listiii{%
135   \leftmargin \leftmarginiii
136   \labelwidth \leftmarginiii
137   \advance\labelwidth by -\labelsep
138   \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
139   \parsep \z@
140   \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
141   \itemsep \topsep}
142 \def\@listiv{%
143   \setlength{\leftmargin}{\leftmarginiv}%
144   \setlength{\labelwidth}{\leftmarginiv}%
145   \addtolength{\labelwidth}{-\labelsep}}
146 \def\@listv{%
147   \setlength{\leftmargin}{\leftmarginv}%
148   \setlength{\labelwidth}{\leftmarginv}%
149   \addtolength{\labelwidth}{-\labelsep}}
150 \def\@listvi{%
151   \setlength{\leftmargin}{\leftmarginvi}%
152   \setlength{\labelwidth}{\leftmarginvi}%
153   \addtolength{\labelwidth}{-\labelsep}}
154 \let\@listi\@listI
155 \@listi

```

1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```

156 \setlength\floatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
157 \setlength\textfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}
158 \setlength\intextsep{10\p@ \@plus 2\p@ \@minus 2\p@}
159 \setlength\dblfloatsep{10\p@ \@plus 2\p@ \@minus 2\p@}
160 \setlength\dbltextfloatsep{18\p@ \@plus 2\p@ \@minus 4\p@}

```

Separation on float pages

```

161 \setlength\@fptop{0\p@ \@plus 1fil}
162 \setlength\@fpsep{8\p@ \@plus 2fil}
163 \setlength\@fpbot{0\p@ \@plus 1fil}
164 \setlength\@dblftop{0\p@ \@plus 1fil}
165 \setlength\@dblfpsep{8\p@ \@plus 2fil}
166 \setlength\@dblfpbot{0\p@ \@plus 1fil}
167
168 \endinput

```

klu10.clo

Kluwer Academic Publishers

1998/02/11

Abstract. This internal file takes care of list definitions and ‘general’ point size options.

Table of Contents

1	Implementation	2
1.1	Section size commands	2
1.2	Various values	3
1.3	Textheight and textwidth	3
1.4	Lists	4
1.5	Float separation parameters	5



© 2008 Kluwer Academic Publishers. Printed in the Netherlands.

1. Implementation

```
1 \ProvidesFile{klu10.clo}[\filedate ]
```

1.1. SECTION SIZE COMMANDS

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 5/6, 6/7, 7/8, 8/9.5, 9/11, 10/12, 12/14, 14/18, 17/22, 20/25, 25/30.

```
2 \renewcommand\normalsize{%
3   \@setfontsize\normalsize\@xpt\@xipt
4   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus 5\p@
5   \abovedisplayshortskip \z@ \@plus 3\p@
6   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus 3\p@
7   \belowdisplayskip \abovedisplayskip
8   \let\@listi\@listI}
9 \normalsize
10 \newcommand\small{%
11   \@setfontsize\small\@ixpt{11}%
12   \abovedisplayskip 8.5\p@ \@plus 3\p@ \@minus 4\p@
13   \abovedisplayshortskip \z@ \@plus 2\p@
14   \belowdisplayshortskip 4\p@ \@plus 2\p@ \@minus 2\p@
15   \def\@listi{\leftmargin\leftmarginI
16             \topsep 4\p@ \@plus 2\p@ \@minus 2\p@
17             \parsep 2\p@ \@plus \p@ \@minus \p@
18             \itemsep \parsep}%
19   \belowdisplayskip \abovedisplayskip
20 }
21 \newcommand\footnotesize{%
22   \@setfontsize\footnotesize\@viipt{9.5}%
23   \abovedisplayskip 6\p@ \@plus 2\p@ \@minus 4\p@
24   \abovedisplayshortskip \z@ \@plus \p@
25   \belowdisplayshortskip 3\p@ \@plus \p@ \@minus 2\p@
26   \def\@listi{\leftmargin\leftmarginI
27             \topsep 3\p@ \@plus \p@ \@minus \p@
28             \parsep 2\p@ \@plus \p@ \@minus \p@
29             \itemsep \parsep}%
30   \belowdisplayskip \abovedisplayskip
31 }
32 \newcommand\scriptsize{\@setfontsize\scriptsize\@viipt\@viipt}
33 \newcommand\little{\@setfontsize\little\@vipt\@viipt}
34 \newcommand\tiny{\@setfontsize\tiny\@vpt\@vipt}
35 \newcommand\large{\@setfontsize\large\@xipt{14}}
36 \newcommand\Large{\@setfontsize\Large\@xivpt{18}}
37 \newcommand\LARGE{\@setfontsize\LARGE\@xviipt{22}}
38 \newcommand\huge{\@setfontsize\huge\@xxpt{25}}
39 \newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```

40 \setlength\hoffset{-1.5cm}
41 \setlength\voffset{0pt}
42 \setlength\parindent {14\p@}
43 \setlength\headheight{12\p@}
44 \setlength\headsep    {12\p@}
45 \setlength\topskip    {10\p@}
46 \setlength\footskip   {27.5\p@}
47 \setlength\marginparsep{10pt}
48 \setlength\marginparpush{5\p@}
49 \setlength\maxdepth   {.5\topskip}
50 \setlength\@maxdepth\maxdepth
51 \setlength\columnsep{10pt}
52 \setlength\columnseprule{0pt}
53 \setlength\fbxsep{3pt}
54 \setlength\fbxrule{.4pt}

```

1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, $\text{\LaTeX}$ calculates `textwidth` out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```

55 \newdimen\id@boxheight
56 \AtBeginDocument{%
57   \setlength\@tempdima{\paperwidth}%
58   \addtolength\@tempdima{-\textwidth}%
59   \divide\@tempdima by 2
60   \setlength\@tempdimb\marginparwidth
61   \addtolength\@tempdimb\marginparsep
62   \addtolength\@tempdimb{2pc}%
63   \ifdim \@tempdima <\@tempdimb
64     \settopoint\@tempdimb
65     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{\}{You made
66       your \string\textwidth\space (\the\textwidth) and
67       \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
68       The allowed value for margin space: (\the\@tempdima). Needed value:
69       (\the\@tempdimb).\MessageBreak
70       This is not enough,
71       so I will set \string\marginparwidth\space to Opt.\MessageBreak
72       Let's hope that fixes it.

```

```

73     }%
74     \marginparwidth \z@
75     \marginparsep \z@
76 \fi
77 \ifdim \@tempdima <2pc
78     \@tempdimb=\paperwidth
79     \advance\@tempdimb by -4pc
80     \@settopoint\@tempdimb
81     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
82     made your \string\textwidth\space (\the\textwidth)
83     wider than the available total\MessageBreak
84     (Which is: \the\@tempdimb). Please press X and try again.
85     }%
86 \fi
87 \oddsidemargin 1in
88 \evensidemargin 1in

```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```

89 \setlength\@tempdima{\paperheight}
90 \addtolength\@tempdima{-\footskip}
91 \addtolength\@tempdima{-\headheight}
92 \addtolength\@tempdima{-\headsep}
93 \setlength\@tempdimb{\@tempdima}
94 \addtolength\@tempdima{-\textheight}
95 \divide\@tempdima by 2
96 \ifdim \@tempdima <2pc
97     \advance\@tempdimb by -4pc
98     \@settopoint\@tempdimb
99     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
100     made your \string\textheight\space (\the\textheight)
101     more than the available total.\MessageBreak
102     (Which is: \the\@tempdimb). Please press X and try again.
103     }%
104 \fi
105 \setlength\topmargin{0pt}
106 \setlength\id@boxheight{\@tempdima}
107 \advance\id@boxheight by -2pc
108 }

109 \setlength\footnotesep{6.65\p@}
110 \setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}

```

1.4. LISTS

List default values

```

111 \setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
112 \setlength{\leftmargini}{2em}
113 \setlength{\leftmarginii}{2.2em}

```

```

114 \setlength{\leftmarginiii}{1.87em}
115 \setlength{\leftmarginiv}{1.7em}
116 \setlength{\leftmarginv}{1em}
117 \setlength{\leftmarginvi}{1em}
118 \setlength{\labelsep}{.4em}
119 \setlength{\labelwidth}{\leftmargini}
120 \addtolength{\labelwidth}{-\labelsep}

```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```

121 \def\@listI{%
122   \leftmargin \leftmargini
123   \topsep 9\p@ \@plus 3\p@ \@minus 5\p@
124   \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
125   \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
126   \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
127 \def\@listii{%
128   \leftmargin \leftmarginii
129   \labelwidth \leftmarginii
130   \advance\labelwidth by -\labelsep
131   \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
132   \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
133   \itemsep \parsep}
134 \def\@listiii{%
135   \leftmargin \leftmarginiii
136   \labelwidth \leftmarginiii
137   \advance\labelwidth by -\labelsep
138   \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
139   \parsep \z@
140   \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
141   \itemsep \topsep}
142 \def\@listiv{%
143   \setlength{\leftmargin}{\leftmarginiv}%
144   \setlength{\labelwidth}{\leftmarginiv}%
145   \addtolength{\labelwidth}{-\labelsep}}
146 \def\@listv{%
147   \setlength{\leftmargin}{\leftmarginv}%
148   \setlength{\labelwidth}{\leftmarginv}%
149   \addtolength{\labelwidth}{-\labelsep}}
150 \def\@listvi{%
151   \setlength{\leftmargin}{\leftmarginvi}%
152   \setlength{\labelwidth}{\leftmarginvi}%
153   \addtolength{\labelwidth}{-\labelsep}}
154 \let\@listi\@listI
155 \let\@listi

```

1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```

156 \setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
157 \setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
158 \setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
159 \setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
160 \setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}

```

Separation on float pages

```

161 \setlength\@fptop{0\p@ \@plus 1fil}
162 \setlength\@fpsep{8\p@ \@plus 2fil}
163 \setlength\@fpbot{0\p@ \@plus 1fil}
164 \setlength\@dblftop{0\p@ \@plus 1fil}
165 \setlength\@dblfpsep{8\p@ \@plus 2fil}
166 \setlength\@dblfpbot{0\p@ \@plus 1fil}
167
168 \endinput

```


klut10.clo

Kluwer Academic Publishers

1998/02/11

Abstract. This internal file takes care of list definitions and ‘general’ point size options. This is a the ‘tight’ file.

Table of Contents

1	Implementation	2
1.1	Section size commands	2
1.2	Various values	3
1.3	Textheight and textwidth	3
1.4	Lists	4
1.5	Float separation parameters	5



© 2008 Kluwer Academic Publishers. Printed in the Netherlands.

1. Implementation

```
1 \ProvidesFile{klut10.clo}[\filedate ]
```

1.1. SECTION SIZE COMMANDS

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 5/6, 6/7, 7/8, 8/9, 9/10.5, 10/11.5, 12/14, 14/18, 17/22, 20/25, 25/30.

```
2 \renewcommand\normalsize{%
3   \@setfontsize\normalsize\@xpt{11.5}%
4   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus5\p@
5   \abovedisplayshortskip \z@ \@plus 3\p@
6   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus3\p@
7   \belowdisplayskip \abovedisplayskip
8   \let\@listi\@listI}
9 \normalsize
10 \newcommand\small{%
11   \@setfontsize\small\@ixpt{10.5}%
12   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
13   \abovedisplayshortskip \z@ \@plus2\p@
14   \belowdisplayshortskip 4\p@ \@plus2\p@ \@minus2\p@
15   \def\@listi{\leftmargin\leftmarginI
16             \topsep 4\p@ \@plus2\p@ \@minus2\p@
17             \parsep 2\p@ \@plus\p@ \@minus\p@
18             \itemsep \parsep}%
19   \belowdisplayskip \abovedisplayskip
20 }
21 \newcommand\footnotesize{%
22   \@setfontsize\footnotesize\@viipt{9}%
23   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
24   \abovedisplayshortskip \z@ \@plus\p@
25   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
26   \def\@listi{\leftmargin\leftmarginI
27             \topsep 3\p@ \@plus\p@ \@minus\p@
28             \parsep 2\p@ \@plus\p@ \@minus\p@
29             \itemsep \parsep}%
30   \belowdisplayskip \abovedisplayskip
31 }
32 \newcommand\scriptsize{\@setfontsize\scriptsize\@viipt\@viipt}
33 \newcommand\little{\@setfontsize\little\@vipt\@viipt}
34 \newcommand\tiny{\@setfontsize\tiny\@vpt\@vipt}
35 \newcommand\large{\@setfontsize\large\@xiipt{14}}
36 \newcommand\Large{\@setfontsize\Large\@xivpt{18}}
37 \newcommand\LARGE{\@setfontsize\LARGE\@xxvipt{22}}
38 \newcommand\huge{\@setfontsize\huge\@xxpt{25}}
39 \newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```

40 \setlength\hoffset{-1in}
41 \setlength\voffset{-1in}
42 \setlength\parindent {14\p@}
43 \setlength\headheight{12\p@}
44 \setlength\headsep    {12\p@}
45 \setlength\topskip    {10\p@}
46 \setlength\footskip   {27.5\p@}
47 \setlength\marginparsep{10pt}
48 \setlength\marginparpush{5\p@}
49 \setlength\maxdepth   {.5\topskip}
50 \setlength\@maxdepth\maxdepth
51 \setlength\columnsep{10pt}
52 \setlength\columnseprule{0pt}
53 \setlength\fbxsep{3pt}
54 \setlength\fbxrule{.4pt}

```

1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, $\text{\LaTeX}$ calculates `textwidth` out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```

55 \newdimen\id@boxheight
56 \AtBeginDocument{%
57   \setlength\@tempdima{\paperwidth}%
58   \addtolength\@tempdima{-\textwidth}%
59   \divide\@tempdima by 2
60   \setlength\@tempdimb\marginparwidth
61   \addtolength\@tempdimb\marginparsep
62   \addtolength\@tempdimb{2pc}%
63   \ifdim \@tempdima < \@tempdimb
64     \settopoint\@tempdimb
65     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{%}{You made
66       your \string\textwidth\space (\the\textwidth) and
67       \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
68       The allowed value for margin space: (\the\@tempdima). Needed value:
69       (\the\@tempdimb).\MessageBreak
70       This is not enough,
71       so I will set \string\marginparwidth\space to Opt.\MessageBreak
72       Let's hope that fixes it.

```

```

73    }%
74    \marginparwidth \z@
75    \marginparsep \z@
76  \fi
77  \ifdim \@tempdima <2pc
78    \@tempdimb=\paperwidth
79    \advance\@tempdimb by -4pc
80    \@settopoint\@tempdimb
81    \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
82    made your \string\textwidth\space (\the\textwidth)
83    wider than the available total\MessageBreak
84    (Which is: \the\@tempdimb). Please press X and try again.
85    }%
86  \fi
87  \oddsidemargin \@tempdima
88  \evensidemargin \@tempdima

```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```

89  \setlength\@tempdima{\paperheight}
90  \addtolength\@tempdima{-\footskip}
91  \addtolength\@tempdima{-\headheight}
92  \addtolength\@tempdima{-\headsep}
93  \setlength\@tempdimb{\@tempdima}
94  \addtolength\@tempdima{-\textheight}
95  \divide\@tempdima by 2
96  \ifdim \@tempdima <2pc
97  \advance\@tempdimb by -4pc
98  \@settopoint\@tempdimb
99  \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
100  made your \string\textheight\space (\the\textheight)
101  more than the available total.\MessageBreak
102  (Which is: \the\@tempdimb). Please press X and try again.
103  }%
104  \fi
105  \setlength\topmargin{\@tempdima}
106  \setlength\id@boxheight{\@tempdima}
107  \advance\id@boxheight by -2pc
108 }

109 \setlength\footnotesep{6.65\p@}
110 \setlength{\skip\footins}{9\p@ \@plus 4\p@ \@minus 2\p@}

```

1.4. LISTS

List default values

```

111 \setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
112 \setlength{\leftmargini}{2em}
113 \setlength{\leftmarginii}{2.2em}

```

```

114 \setlength{\leftmarginiii}{1.87em}
115 \setlength{\leftmarginiv}{1.7em}
116 \setlength{\leftmarginv}{1em}
117 \setlength{\leftmarginvi}{1em}
118 \setlength{\labelsep}{.4em}
119 \setlength{\labelwidth}{\leftmargini}
120 \addtolength{\labelwidth}{-\labelsep}

```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```

121 \def\@listI{%
122   \leftmargin \leftmargini
123   \topsep 9\p@ \@plus 3\p@ \@minus 5\p@
124   \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
125   \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
126   \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
127 \def\@listii{%
128   \leftmargin \leftmarginii
129   \labelwidth \leftmarginii
130   \advance\labelwidth by -\labelsep
131   \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
132   \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
133   \itemsep \parsep}
134 \def\@listiii{%
135   \leftmargin \leftmarginiii
136   \labelwidth \leftmarginiii
137   \advance\labelwidth by -\labelsep
138   \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
139   \parsep \z@
140   \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
141   \itemsep \topsep}
142 \def\@listiv{%
143   \setlength{\leftmargin}{\leftmarginiv}%
144   \setlength{\labelwidth}{\leftmarginiv}%
145   \addtolength{\labelwidth}{-\labelsep}}
146 \def\@listv{%
147   \setlength{\leftmargin}{\leftmarginv}%
148   \setlength{\labelwidth}{\leftmarginv}%
149   \addtolength{\labelwidth}{-\labelsep}}
150 \def\@listvi{%
151   \setlength{\leftmargin}{\leftmarginvi}%
152   \setlength{\labelwidth}{\leftmarginvi}%
153   \addtolength{\labelwidth}{-\labelsep}}
154 \let\@listi\@listI
155 \let\@listi

```

1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```

156 \setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
157 \setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
158 \setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
159 \setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
160 \setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}

```

Separation on float pages

```

161 \setlength\@fptop{0\p@ \@plus 1fil}
162 \setlength\@fpsep{8\p@ \@plus 2fil}
163 \setlength\@fpbot{0\p@ \@plus 1fil}
164 \setlength\@dblftop{0\p@ \@plus 1fil}
165 \setlength\@dblpsep{8\p@ \@plus 2fil}
166 \setlength\@dblfpbot{0\p@ \@plus 1fil}
167
168 \endinput

```

klut11.clo

Kluwer Academic Publishers

1998/02/11

Abstract. This internal file takes care of list definitions and ‘general’ point size options. This is a the ‘tight’ file.

Table of Contents

1	Implementation	2
1.1	Section size commands	2
1.2	Various values	3
1.3	Textheight and textwidth	3
1.4	Lists	5
1.5	Float separation parameters	6



© 2008 Kluwer Academic Publishers. Printed in the Netherlands.

1. Implementation

```
1 \ProvidesFile{klut11.clo}[\filedate ]
```

1.1. SECTION SIZE COMMANDS

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 6/7, 7/8, 8/9, 9/10.5, 10/11.5, 11/12.5, 12/14, 14/18, 17/22, 20/25, 25/30.

```
2 \renewcommand\normalsize{%
3   \@setfontsize\normalsize\@xipt{12.5}%
4   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus 5\p@
5   \abovedisplayshortskip \z@ \@plus 3\p@
6   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus 3\p@
7   \belowdisplayskip \abovedisplayskip
8   \let\@listi\@listI}
9 \normalsize
10 \newcommand\small{%
11   \@setfontsize\small\@xpt{11.5}%
12   \abovedisplayskip 9\p@ \@plus 3\p@ \@minus 4\p@
13   \abovedisplayshortskip \z@ \@plus 2\p@
14   \belowdisplayshortskip 5\p@ \@plus 2\p@ \@minus 2\p@
15   \def\@listi{\leftmargin\leftmarginI
16             \topsep 4\p@ \@plus 2\p@ \@minus 2\p@
17             \parsep 2\p@ \@plus \p@ \@minus \p@
18             \itemsep \parsep}%
19   \belowdisplayskip \abovedisplayskip
20 }
21 \newcommand\footnotesize{%
22   \@setfontsize\footnotesize\@ixpt{10.5}%
23   \abovedisplayskip 6\p@ \@plus 2\p@ \@minus 4\p@
24   \abovedisplayshortskip \z@ \@plus \p@
25   \belowdisplayshortskip 3\p@ \@plus \p@ \@minus 2\p@
26   \def\@listi{\leftmargin\leftmarginI
27             \topsep 3\p@ \@plus \p@ \@minus \p@
28             \parsep 2\p@ \@plus \p@ \@minus \p@
29             \itemsep \parsep}%
30   \belowdisplayskip \abovedisplayskip
31 }
32 \newcommand\scriptsize{\@setfontsize\scriptsize\@viipt{9.5}}
33 \newcommand\little{\@setfontsize\little\@viipt\@viipt}
34 \newcommand\tiny{\@setfontsize\tiny\@vpt\@viipt}
35 \newcommand\large{\@setfontsize\large\@xiipt{14}}
36 \newcommand\Large{\@setfontsize\Large\@xivpt{18}}
37 \newcommand\LARGE{\@setfontsize\LARGE\@xxvpt{22}}
38 \newcommand\huge{\@setfontsize\huge\@xxpt{25}}
```



```
39 \newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
40 \setlength\hoffset{-1in}
41 \setlength\voffset{-1in}
42 \setlength\parindent {14\p@}
43 \setlength\headheight{12\p@}
44 \setlength\headsep    {12\p@}
45 \setlength\topskip    {10\p@}
46 \setlength\footskip   {27.5\p@}
47 \setlength\marginparsep{10pt}
48 \setlength\marginparpush{5\p@}
49 \setlength\maxdepth   {.5\topskip}
50 \setlength\@maxdepth\maxdepth
51 \setlength\columnsep{10pt}
52 \setlength\columnseprule{0pt}
53 \setlength\fbboxsep{3pt}
54 \setlength\fbboxrule{.4pt}
```

1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, $\text{\LaTeX}$ calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
55 \newdimen\id@boxheight
56 \AtBeginDocument{%
57   \setlength\@tempdima{\paperwidth}%
58   \addtolength\@tempdima{-\textwidth}%
59   \divide\@tempdima by 2
60   \setlength\@tempdimb\marginparwidth
61   \addtolength\@tempdimb\marginparsep
62   \addtolength\@tempdimb{2pc}%
63   \ifdim \@tempdima < \@tempdimb
64     \@settopoint\@tempdimb
65     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
```

```

66     your \string\textwidth\space (\the\textwidth) and
67     \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
68     The allowed value for margin space: (\the\@tempdima). Needed value:
69     (\the\@tempdimb).\MessageBreak
70     This is not enough,
71     so I will set \string\marginparwidth\space to 0pt.\MessageBreak
72     Let's hope that fixes it.
73 }%
74 \marginparwidth \z@
75 \marginparsep \z@
76 \fi
77 \ifdim \@tempdima <2pc
78     \@tempdimb=\paperwidth
79     \advance\@tempdimb by -4pc
80     \@settopoint\@tempdimb
81     \GenericError{Pointsizes}{Pointsizes Error: Invalid sizes given}{}{You
82     made your \string\textwidth\space (\the\textwidth)
83     wider than the available total.\MessageBreak
84     (Which is: \the\@tempdimb). Please press X and try again.
85 }%
86 \fi
87 \oddsidemargin \@tempdima
88 \evensidemargin \@tempdima

```

These calculations are a lot easier. `\textheight` should have been set already.
This does not check for the correct placement of the identification line!!

```

89 \setlength\@tempdima{\paperheight}
90 \addtolength\@tempdima{-\footskip}
91 \addtolength\@tempdima{-\headheight}
92 \addtolength\@tempdima{-\headsep}
93 \setlength\@tempdimb{\@tempdima}
94 \addtolength\@tempdima{-\textheight}
95 \divide\@tempdima by 2
96 \ifdim \@tempdima <2pc
97     \advance\@tempdimb by -4pc
98     \@settopoint\@tempdimb
99     \GenericError{Pointsizes}{Pointsizes Error: Invalid sizes given}{}{You
100     made your \string\textheight\space (\the\textheight)
101     more than the available total.\MessageBreak
102     (Which is: \the\@tempdimb). Please press X and try again.
103 }%
104 \fi
105 \setlength\topmargin{\@tempdima}
106 \setlength\id@boxheight{\@tempdima}
107 \advance\id@boxheight by -2pc
108 }

```

```

109 \setlength\footnotesep{6.65\p@}
110 \setlength\skip\footins{9\p@ \@plus 4\p@ \@minus 2\p@}

```

1.4. LISTS

List default values

```

111 \setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
112 \setlength\leftmargini{2em}
113 \setlength\leftmarginii{2.2em}
114 \setlength\leftmarginiii{1.87em}
115 \setlength\leftmarginiv{1.7em}
116 \setlength\leftmarginv{1em}
117 \setlength\leftmarginvi{1em}
118 \setlength\labelsep{.4em}
119 \setlength\labelwidth{\leftmargini}
120 \addtolength\labelwidth{-\labelsep}

```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```

121 \def\@listI{%
122   \leftmargin \leftmargini
123   \topsep 9\p@ \@plus 3\p@ \@minus 5\p@
124   \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
125   \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
126   \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
127 \def\@listII{%
128   \leftmargin \leftmarginii
129   \labelwidth \leftmarginii
130   \advance\labelwidth by -\labelsep
131   \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
132   \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
133   \itemsep \parsep}
134 \def\@listIII{%
135   \leftmargin \leftmarginiii
136   \labelwidth \leftmarginiii
137   \advance\labelwidth by -\labelsep
138   \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
139   \parsep \z@
140   \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
141   \itemsep \topsep}
142 \def\@listIV{%
143   \setlength\leftmargin{\leftmarginiv}%
144   \setlength\labelwidth{\leftmarginiv}%
145   \addtolength\labelwidth{-\labelsep}}
146 \def\@listV{%

```

```

147 \setlength{\leftmargin}{\leftmarginv}%
148 \setlength{\labelwidth}{\leftmarginv}%
149 \addtolength{\labelwidth}{-\labelsep}}
150 \def\@listvi{%
151 \setlength{\leftmargin}{\leftmarginvi}%
152 \setlength{\labelwidth}{\leftmarginvi}%
153 \addtolength{\labelwidth}{-\labelsep}}
154 \let\@listi\@listI
155 \@listi

```

1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```

156 \setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
157 \setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
158 \setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
159 \setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
160 \setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}

```

Separation on float pages

```

161 \setlength\@fptop{0\p@ \@plus 1fil}
162 \setlength\@fpsep{8\p@ \@plus 2fil}
163 \setlength\@fpbot{0\p@ \@plus 1fil}
164 \setlength\@dblftop{0\p@ \@plus 1fil}
165 \setlength\@dblfpsep{8\p@ \@plus 2fil}
166 \setlength\@dblfpbot{0\p@ \@plus 1fil}
167
168 \endinput

```

klut12.clo

Kluwer Academic Publishers

1998/02/11

Abstract. This internal file takes care of list definitions and ‘general’ point size options. This is a tight version.

Table of Contents

1	Implementation	2
1.1	Section size commands	2
1.2	Various values	3
1.3	Textheight and textwidth	3
1.4	Lists	5
1.5	Float separation parameters	6



© 2008 *Kluwer Academic Publishers. Printed in the Netherlands.*

1. Implementation

```
1 \ProvidesFile{klut12.clo}[\filedate ]
```

1.1. SECTION SIZE COMMANDS

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 6/7, 8/9, 9/10.5, 10/11.5, 11/12.5 12/13.5, 14/18, 17/22, 20/25, 25/30.

```
2 \renewcommand\normalsize{%
3   \@setfontsize\normalsize\@xipt{13.5}%
4   \abovedisplayskip 11\p@ \@plus 2\p@ \@minus5\p@
5   \abovedisplayshortskip 1\p@ \@plus 3\p@
6   \belowdisplayshortskip 7\p@ \@plus 3\p@ \@minus3\p@
7   \belowdisplayskip \abovedisplayskip
8   \let\@listi\@listI}
9 \normalsize
10 \newcommand\small{%
11   \@setfontsize\small\@xipt{12.5}%
12   \abovedisplayskip 8.5\p@ \@plus3\p@ \@minus4\p@
13   \abovedisplayshortskip \z@ \@plus2\p@
14   \belowdisplayshortskip 4\p@ \@plus2\p@ \@minus2\p@
15   \def\@listi{\leftmargin\leftmarginI
16             \topsep 4\p@ \@plus2\p@ \@minus2\p@
17             \parsep 2\p@ \@plus\p@ \@minus\p@
18             \itemsep \parsep}%
19   \belowdisplayskip \abovedisplayskip
20 }
21 \newcommand\footnotesize{%
22   \@setfontsize\footnotesize\@xpt{11.5}%
23   \abovedisplayskip 6\p@ \@plus2\p@ \@minus4\p@
24   \abovedisplayshortskip \z@ \@plus\p@
25   \belowdisplayshortskip 3\p@ \@plus\p@ \@minus2\p@
26   \def\@listi{\leftmargin\leftmarginI
27             \topsep 3\p@ \@plus\p@ \@minus\p@
28             \parsep 2\p@ \@plus\p@ \@minus\p@
29             \itemsep \parsep}%
30   \belowdisplayskip \abovedisplayskip
31 }
32 \newcommand\scriptsize{\@setfontsize\scriptsize\@ixpt{10.5}}
33 \newcommand\little{\@setfontsize\little\@viipt{9}}
34 \newcommand\tiny{\@setfontsize\tiny\@vpt{\@viipt}}
```

```

35 \newcommand\large{\@setfontsize\large\@xvpt{18}}
36 \newcommand\Large{\@setfontsize\Large\@xviipt{22}}
37 \newcommand\LARGE{\@setfontsize\LARGE\@xxpt{25}}
38 \newcommand\huge{\@setfontsize\huge\@xxvpt{30}}
39 \newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}

```

1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```

40 \setlength\hoffset{-1in}
41 \setlength\voffset{-1in}
42 \setlength\parindent {14\p@}
43 \setlength\headheight{12\p@}
44 \setlength\headsep   {12\p@}
45 \setlength\topskip   {10\p@}
46 \setlength\footskip  {27.5\p@}
47 \setlength\marginparsep{10pt}
48 \setlength\marginparpush{5\p@}
49 \setlength\maxdepth  {.5\topskip}
50 \setlength\@maxdepth\maxdepth
51 \setlength\columnsep{12pt}
52 \setlength\columnseprule{0pt}
53 \setlength\fbboxsep{3pt}
54 \setlength\fbboxrule{.4pt}

```

1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, $\text{\LaTeX}$ calculates `textwidth` out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```

55 \newdimen\id@boxheight
56 \AtBeginDocument{%
57   \setlength\@tempdima{\paperwidth}%
58   \addtolength\@tempdima{-\textwidth}%

```

```

59 \divide\@tempdima by 2
60 \setlength\@tempdimb\marginparwidth
61 \addtolength\@tempdimb\marginparsep
62 \addtolength\@tempdimb{2pc}%
63 \ifdim \@tempdima <\@tempdimb
64     \@settopoint\@tempdimb
65     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
66     your \string\textwidth\space (\the\textwidth) and
67     \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
68     The allowed value for margin space: (\the\@tempdima). Needed value:
69     (\the\@tempdimb).\MessageBreak
70     This is not enough,
71     so I will set \string\marginparwidth\space to Opt.\MessageBreak
72     Let's hope that fixes it.
73 }%
74 \marginparwidth \z@
75 \marginparsep \z@
76 \fi
77 \ifdim \@tempdima <2pc
78     \@tempdimb=\paperwidth
79     \advance\@tempdimb by -4pc
80     \@settopoint\@tempdimb
81     \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{}{You
82     made your \string\textwidth\space (\the\textwidth)
83     wider than the available total\MessageBreak
84     (Which is: \the\@tempdimb). Please press X and try again.
85 }%
86 \fi
87 \oddsidemargin \@tempdima
88 \evensidemargin \@tempdima

```

These calculations are a lot easier. `\textheight` should have been set already. This does not check for the correct placement of the identification line!!

```

89 \setlength\@tempdima{\paperheight}
90 \addtolength\@tempdima{-\footskip}
91 \addtolength\@tempdima{-\headheight}
92 \addtolength\@tempdima{-\headsep}
93 \setlength\@tempdimb{\@tempdima}
94 \addtolength\@tempdima{-\textheight}
95 \divide\@tempdima by 2
96 \ifdim \@tempdima <2pc
97 \advance\@tempdimb by -4pc
98 \@settopoint\@tempdimb

```



```

99      \GenericError{Pointsize}{Pointsize Error: Invalid sizes given}{\}{You
100      made your \string\textheight\space (\the\textheight)
101      more than the available total.\MessageBreak
102      (Which is: \the\@tempdimb). Please press X and try again.
103      }%
104      \fi
105      \setlength\topmargin{\@tempdima}
106      \setlength\id@boxheight{\@tempdima}
107      \advance\id@boxheight by -2pc
108  }

109 \setlength\footnotesep{6.65\p@}
110 \setlength\skip\footins{12\p@ \@plus 4\p@ \@minus 2\p@}

```

1.4. LISTS

List default values

```

111 \setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
112 \setlength\leftmargini{2em}
113 \setlength\leftmarginii{2.2em}
114 \setlength\leftmarginiii{1.87em}
115 \setlength\leftmarginiv{1.7em}
116 \setlength\leftmarginv{1em}
117 \setlength\leftmarginvi{1em}
118 \setlength\labelsep{.4em}
119 \setlength\labelwidth{\leftmargini}
120 \addtolength\labelwidth{-\labelsep}

```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```

121 \def\@listI{%
122   \leftmargin \leftmargini
123   \topsep 11\p@ \@plus 3\p@ \@minus 5\p@
124   \partopsep 4.5\p@ \@plus 1\p@ \@minus 2\p@
125   \itemsep 6\p@ \@plus 2\p@ \@minus 1\p@
126   \parsep 6\p@ \@plus 2\p@ \@minus 1\p@ }
127 \def\@listii{%
128   \leftmargin \leftmarginii
129   \labelwidth \leftmarginii
130   \advance\labelwidth by -\labelsep
131   \topsep 6\p@ \@plus 2\p@ \@minus 1\p@
132   \parsep 3\p@ \@plus 1\p@ \@minus 1\p@

```

```

133 \itemsep \parsep}
134 \def\@listiii{%
135 \leftmargin \leftmarginiii
136 \labelwidth \leftmarginiii
137 \advance\labelwidth by -\labelsep
138 \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
139 \parsep \z@
140 \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
141 \itemsep \topsep}
142 \def\@listiv{%
143 \setlength{\leftmargin}{\leftmarginiv}%
144 \setlength{\labelwidth}{\leftmarginiv}%
145 \addtolength{\labelwidth}{-\labelsep}}
146 \def\@listv{%
147 \setlength{\leftmargin}{\leftmarginv}%
148 \setlength{\labelwidth}{\leftmarginv}%
149 \addtolength{\labelwidth}{-\labelsep}}
150 \def\@listvi{%
151 \setlength{\leftmargin}{\leftmarginvi}%
152 \setlength{\labelwidth}{\leftmarginvi}%
153 \addtolength{\labelwidth}{-\labelsep}}
154 \let\@listi\@listI
155 \@listi

```

1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```

156 \setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
157 \setlength\textfloatsep{24\p@ \@plus 2\p@ \@minus 4\p@}
158 \setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
159 \setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
160 \setlength\dbltextfloatsep{24\p@ \@plus 2\p@ \@minus 4\p@}

```

Separation on float pages

```

161 \setlength\@fptop{0\p@ \@plus 1fil}
162 \setlength\@fpsep{10\p@ \@plus 2fil}
163 \setlength\@fpbot{0\p@ \@plus 1fil}
164 \setlength\@dblfpptop{0\p@ \@plus 1fil}
165 \setlength\@dblfpsep{10\p@ \@plus 2fil}
166 \setlength\@dblfpbot{0\p@ \@plus 1fil}
167
168 \endinput

```

klu105.clo

Kluwer Academic Publishers

1998/02/11

Abstract. This internal file takes care of list definitions and ‘general’ point size options.

Table of Contents

1	Implementation	2
1.1	Section size commands	2
1.2	Various values	3
1.3	Textheight and textwidth	3
1.4	Lists	5
1.5	Float separation parameters	6



© 2008 Kluwer Academic Publishers. Printed in the Netherlands.

1. Implementation

```
1 \ProvidesFile{klu105.clo}[\filedate ]
```

1.1. SECTION SIZE COMMANDS

added command: `\little`. This between `\scriptsize` and `\tiny`. Allowed type provided values: 6/7, 7/8, 9/11, 10/11.5, 10.5/12, 11/13, 12/14, 14/18, 17/22, 20/25, 25/30.

```
2 \renewcommand\normalsize{%
3   \@setfontsize\normalsize{10.5pt}{12}%
4   \abovedisplayskip 10\p@ \@plus 2\p@ \@minus 5\p@
5   \abovedisplayshortskip \z@ \@plus 3\p@
6   \belowdisplayshortskip 6\p@ \@plus 3\p@ \@minus 3\p@
7   \belowdisplayskip \abovedisplayskip
8   \let\@listi\@listI}
9 \normalsize
10 \newcommand\small{%
11   \@setfontsize\small\@xpt{11.5}%
12   \abovedisplayskip 9\p@ \@plus 3\p@ \@minus 4\p@
13   \abovedisplayshortskip \z@ \@plus 2\p@
14   \belowdisplayshortskip 5\p@ \@plus 2\p@ \@minus 2\p@
15   \def\@listi{\leftmargin\leftmargini
16     \topsep 4\p@ \@plus 2\p@ \@minus 2\p@
17     \parsep 2\p@ \@plus \p@ \@minus \p@
18     \itemsep \parsep}%
19   \belowdisplayskip \abovedisplayskip
20 }
21 \newcommand\footnotesize{%
22   \@setfontsize\footnotesize\@ixpt\@xipt
23   \abovedisplayskip 6\p@ \@plus 2\p@ \@minus 4\p@
24   \abovedisplayshortskip \z@ \@plus \p@
25   \belowdisplayshortskip 3\p@ \@plus \p@ \@minus 2\p@
26   \def\@listi{\leftmargin\leftmargini
27     \topsep 3\p@ \@plus \p@ \@minus \p@
28     \parsep 2\p@ \@plus \p@ \@minus \p@
29     \itemsep \parsep}%
30   \belowdisplayskip \abovedisplayskip
31 }
32 \newcommand\scriptsize{\@setfontsize\scriptsize\@viipt{9.5}}
33 \newcommand\little{\@setfontsize\little\@viipt\@viipt}
34 \newcommand\tiny{\@setfontsize\tiny\@viipt\@viipt}
35 \newcommand\large{\@setfontsize\large\@xiipt{14}}
36 \newcommand\Large{\@setfontsize\Large\@xivpt{18}}
37 \newcommand\LARGE{\@setfontsize\LARGE\@xxviipt{22}}
38 \newcommand\huge{\@setfontsize\huge\@xxxpt{25}}
```

```
39 \newcommand\Huge{\@setfontsize\Huge\@xxvpt{30}}
```

1.2. VARIOUS VALUES

Note that `\hoffset` and `\voffset` are both compensated. This makes the calculations below easier.

```
40 \setlength\hoffset{-1in}
41 \setlength\voffset{-1in}
42 \setlength\parindent {14\p@}
43 \setlength\headheight{12\p@}
44 \setlength\headsep    {13\p@}
45 \setlength\topskip    {10\p@}
46 \setlength\footskip   {27.5\p@}
47 \setlength\marginparsep{10pt}
48 \setlength\marginparpush{5\p@}
49 \setlength\maxdepth   {.5\topskip}
50 \setlength\@maxdepth\maxdepth
51 \setlength\columnsep{10pt}
52 \setlength\columnseprule{0pt}
53 \setlength\fbxsep{3pt}
54 \setlength\fbxrule{.4pt}
```

1.3. TEXTHEIGHT AND TEXTWIDTH

These are the main reason for the existence of these files. For some stupid reason, $\text{\LaTeX}$ calculates textwidth out of `\paperwidth`. We did want to support letter paper, but our `\textwidth` is fixed, with the margins being calculated.

Presume `\textwidth` and `\marginparwidth` are set in the stylefile, or we're in trouble. The `2pc` value is used to compensate for the 'dead' corners in most laserprinters.

Calculations are done 'AtBeginDocument' to allow changes made in the preamble and later on in the stylefile.

```
55 \newdimen\id@boxheight
56 \AtBeginDocument{%
57   \setlength\@tempdima{\paperwidth}%
58   \addtolength\@tempdima{-\textwidth}%
59   \divide\@tempdima by 2
60   \setlength\@tempdimb\marginparwidth
61   \addtolength\@tempdimb\marginparsep
62   \addtolength\@tempdimb{2pc}%
63   \ifdim \@tempdima < \@tempdimb
64     \@settopoint\@tempdimb
65     \GenericError{Pointsize}{Pointsize Error: Marginpars disabled}{}{You made
```

```

66     your \string\textwidth\space (\the\textwidth) and
67     \string\marginparwidth (\the\marginparwidth) too wide.\MessageBreak
68     The allowed value for margin space: (\the\@tempdima). Needed value:
69     (\the\@tempdimb).\MessageBreak
70     This is not enough,
71     so I will set \string\marginparwidth\space to 0pt.\MessageBreak
72     Let's hope that fixes it.
73 }%
74 \marginparwidth \z@
75 \marginparsep \z@
76 \fi
77 \ifdim \@tempdima <2pc
78     \@tempdimb=\paperwidth
79     \advance\@tempdimb by -4pc
80     \@settopoint\@tempdimb
81     \GenericError{Pointsizes}{Pointsizes Error: Invalid sizes given}{}{You
82     made your \string\textwidth\space (\the\textwidth)
83     wider than the available total.\MessageBreak
84     (Which is: \the\@tempdimb). Please press X and try again.
85 }%
86 \fi
87 \oddsidemargin \@tempdima
88 \evensidemargin \@tempdima

```

These calculations are a lot easier. `\textheight` should have been set already.
This does not check for the correct placement of the identification line!!

```

89 \setlength\@tempdima{\paperheight}
90 \addtolength\@tempdima{-\footskip}
91 \addtolength\@tempdima{-\headheight}
92 \addtolength\@tempdima{-\headsep}
93 \setlength\@tempdimb{\@tempdima}
94 \addtolength\@tempdima{-\textheight}
95 \divide\@tempdima by 2
96 \ifdim \@tempdima <2pc
97     \advance\@tempdimb by -4pc
98     \@settopoint\@tempdimb
99     \GenericError{Pointsizes}{Pointsizes Error: Invalid sizes given}{}{You
100     made your \string\textheight\space (\the\textheight)
101     more than the available total.\MessageBreak
102     (Which is: \the\@tempdimb). Please press X and try again.
103 }%
104 \fi
105 \setlength\topmargin{\@tempdima}
106 \setlength\id@boxheight{\@tempdima}
107 \advance\id@boxheight by -2pc
108 }

```

```

109 \setlength\footnotesep{6.65\p@}
110 \setlength\skip\footins{9\p@ \@plus 4\p@ \@minus 2\p@}

```

1.4. LISTS

List default values

```

111 \setlength\partopsep{2\p@ \@plus 1\p@ \@minus 1\p@}
112 \setlength\leftmargini{2em}
113 \setlength\leftmarginii{2.2em}
114 \setlength\leftmarginiii{1.87em}
115 \setlength\leftmarginiv{1.7em}
116 \setlength\leftmarginv{1em}
117 \setlength\leftmarginvi{1em}
118 \setlength\labelsep{.4em}
119 \setlength\labelwidth{\leftmargini}
120 \addtolength\labelwidth{-\labelsep}

```

Note that lists below level 3 do nothing else then readjusting the `\labelwidth`. This results in very small labels for the inner lists.

```

121 \def\@listI{%
122   \leftmargin \leftmargini
123   \topsep 9\p@ \@plus 3\p@ \@minus 5\p@
124   \partopsep 3\p@ \@plus 1\p@ \@minus 2\p@
125   \itemsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
126   \parsep 4.5\p@ \@plus 2\p@ \@minus 1\p@ }
127 \def\@listII{%
128   \leftmargin \leftmarginii
129   \labelwidth \leftmarginii
130   \advance\labelwidth by -\labelsep
131   \topsep 4.5\p@ \@plus 2\p@ \@minus 1\p@
132   \parsep 2\p@ \@plus 1\p@ \@minus 1\p@
133   \itemsep \parsep}
134 \def\@listIII{%
135   \leftmargin \leftmarginiii
136   \labelwidth \leftmarginiii
137   \advance\labelwidth by -\labelsep
138   \topsep 2\p@ \@plus 1\p@ \@minus 1\p@
139   \parsep \z@
140   \partopsep 1\p@ \@plus 0\p@ \@minus 1\p@
141   \itemsep \topsep}
142 \def\@listIV{%
143   \setlength\leftmargin{\leftmarginiv}%
144   \setlength\labelwidth{\leftmarginiv}%
145   \addtolength\labelwidth{-\labelsep}}
146 \def\@listV{%

```

```

147 \setlength{\leftmargin}{\leftmarginv}%
148 \setlength{\labelwidth}{\leftmarginv}%
149 \addtolength{\labelwidth}{-\labelsep}}
150 \def\@listvi{%
151 \setlength{\leftmargin}{\leftmarginvi}%
152 \setlength{\labelwidth}{\leftmarginvi}%
153 \addtolength{\labelwidth}{-\labelsep}}
154 \let\@listi\@listI
155 \@listi

```

1.5. FLOAT SEPARATION PARAMETERS

Separation on text pages.

```

156 \setlength\floatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
157 \setlength\textfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}
158 \setlength\intextsep{12\p@ \@plus 2\p@ \@minus 2\p@}
159 \setlength\dblfloatsep{12\p@ \@plus 2\p@ \@minus 2\p@}
160 \setlength\dbltextfloatsep{20\p@ \@plus 2\p@ \@minus 4\p@}

```

Separation on float pages

```

161 \setlength\@fptop{0\p@ \@plus 1fil}
162 \setlength\@fpsep{8\p@ \@plus 2fil}
163 \setlength\@fpbot{0\p@ \@plus 1fil}
164 \setlength\@dblftop{0\p@ \@plus 1fil}
165 \setlength\@dblfpsep{8\p@ \@plus 2fil}
166 \setlength\@dblfpbot{0\p@ \@plus 1fil}
167
168 \endinput

```


Diffuse Galactic γ -rays: Constraining Cosmic-Ray Origin and Propagation

Igor V. Moskalenko* and Andrew W. Strong

Max-Planck-Institut für extraterrestrische Physik, D-85740 Garching, Germany

February 1, 2008

Abstract. We have developed a model which aims to reproduce observational data of many kinds related to cosmic-ray (CR) origin and propagation: direct measurements of nuclei, antiprotons, electrons and positrons, γ -rays, and synchrotron radiation. Our main results include evaluation of diffusion/convection and reacceleration models, estimates of the halo size, calculations of the interstellar positron and antiproton spectra, evaluation of alternative hypotheses of nucleon and electron interstellar spectra, and computation of the Galactic diffuse γ -ray emission. Recently our CR propagation code has been generalized to include fragmentation networks of arbitrary complexity. The code can now provide an alternative to leaky-box calculations for full isotopic abundance calculations and has the advantage of including the spatial dimension which is essential for radioactive nuclei. Preliminary predictions for sub-Fe/Fe, $^{10}\text{Be}/^9\text{Be}$ and $^{26}\text{Al}/^{27}\text{Al}$ are presented in anticipation of new experimental isotopic data. We show that combining information from classical CR studies with γ -ray and other data leads to tighter constraints on CR origin and propagation.

Keywords: Cosmic rays, abundances, propagation, gamma rays

1. Introduction and the Modelling Approach

A numerical method for the calculation of Galactic CR propagation in 3D has been developed. Our program¹ (SM98, MS98, MSR98, SMR99) performs CR propagation calculations for nuclei, antiprotons, electrons and positrons and computes γ -ray and synchrotron emission in the same framework. The 3D spatial approach with a realistic distribution of interstellar gas distinguishes it from leaky-box calculations. The basic spatial propagation mechanisms are diffusion and convection, while in momentum space energy loss and diffusive reacceleration are treated. Fragmentation and energy losses are computed using realistic distributions for the interstellar gas and radiation fields. The basic procedure is first to obtain a set of propagation parameters which reproduce the CR B/C and $^{10}\text{Be}/^9\text{Be}$ ratios; the same propagation conditions are then applied to all the CR species. Gamma-ray and synchrotron emission are

* also Institute for Nuclear Physics, Moscow State University, Moscow, Russia

¹ Our model (“GALPROP”) including software and datasets is available at <http://www.gamma.mpe-garching.mpg.de/~aws/aws.html>



then evaluated with the same model. We aim for a “standard model” which can be improved with new astrophysical input and additional observational constraints.

GALPROP solves the Galactic CR propagation equation numerically on a grid in 3D with cylindrical symmetry, and the basic coordinates are (R, z, p) , where R is Galactocentric radius, z is the distance from the Galactic plane, and p is the total particle momentum. In the models the propagation region is bounded by $R = R_h$, $z = \pm z_h$ beyond which free escape is assumed. For a given z_h the diffusion coefficient as a function of momentum is determined by B/C for the case of no reacceleration; if reacceleration is assumed then the reacceleration strength (related to the Alfvén speed, v_A) is constrained by the energy-dependence of B/C. We include diffusive reacceleration since some stochastic reacceleration is inevitable, and it provides a natural mechanism to reproduce the energy dependence of the B/C ratio without an *ad hoc* form for the diffusion coefficient (e.g., Seo and Ptuskin, 1994). The distribution of CR sources is chosen to reproduce (after propagation) the CR distribution determined by analysis of EGRET γ -ray data (Strong and Mattox, 1996). The bremsstrahlung and inverse Compton (IC) γ -rays are computed self-consistently from the gas and radiation fields used for the propagation.

Tighter constraints on the parameters of CR propagation and source abundances can be obtained from consideration of all CR isotopes simultaneously. We have now been able to generalize the scheme to include the CR reaction networks of arbitrary complexity. The scheme can hence potentially compete with leaky-box calculations for computation of isotopic abundances, while retaining the spatial component essential for radioactive nuclei, electrons and γ -rays. Even for stable nuclei it has the advantage of a physically-based propagation scheme with a spatial distribution of sources rather than an *ad hoc* path length distribution. It also facilitates tests of reacceleration.

The new extended approach for nuclei handles the reaction network explicitly (SM99b), as follows: (i) propagate primary species from an assumed set of source abundances, (ii) compute the resulting spallation source function for all species, (iii) propagate all species using the primary and spallation sources. Steps (ii) and (iii) are iterated until converged. After the second iteration the result is already accurate for the pure secondary component, after the third iteration it is accurate for tertiaries, and so on. Hence in practice only a few such iterations are necessary for a complete solution of the network. The method is more time-consuming than the simpler approach we used before, where multiple progenitors and tertiary etc. reactions were handled by weighting

the cross-sections, since many more species are included and because of the several iterations required.

2. Probes of Interstellar Propagation

Measurements of nucleons in CR provide a basis for probing interstellar propagation and determining the halo size. The ratio of stable secondary to primary nuclei is often used to constrain such parameters as the diffusion coefficient, reacceleration strength and/or convection velocity, while long-lived radioactive species can be a probe of the extent of the propagation volume.

To constrain the parameters of propagation we use the B/C ratio which is measured over a wide energy range. In diffusion/convection models with a diffusion coefficient which is a simple power-law in momentum a good fit is *not* possible; the basic effect of convection is to reduce the variation of B/C with energy, and although this improves the fit at low energies the characteristic peaked shape of the measured B/C cannot be reproduced. Although modulation makes the comparison with the low energy data somewhat uncertain, the fit is unsatisfactory. We concluded therefore that convection does not seem to work in detail, but requires an artificial break in the diffusion coefficient. If instead we consider diffusive reacceleration, the peak is produced rather naturally (as many people have pointed out) so that we rather prefer this solution.

Propagation parameters² for a model with reacceleration are: halo size $z_h = 4$ kpc, $v_A = 20$ km s⁻¹, diffusion coefficient $D = D_0\beta(p/p_0)^{1/3}$, where $D_0 = 6.75 \times 10^{28}$ cm² s⁻¹, and $p_0 = 3$ GeV.

We have applied the method to a network of 87 nuclei from protons to Ni, including explicitly all stable species and radioactive species with half-life more than 10⁵ years. Isotopic cross sections are based on measured values where available. Otherwise we use the Webber et al. (1990) cross-section code. Source abundances are from DuVernois and Thayer (1996), with solar isotopic ratios within a given element.

Fig. 1 shows B/C and sub-Fe/Fe. This model with reacceleration reproduces the sub-Fe data reasonably well considering that the model was adjusted only to fit B/C. The deviation from the observed sub-Fe/Fe shape is however noticeable, as discussed by Webber (1997).

Fig. 2 shows examples of radioactive species. Modulation is for nominal values of the modulation parameter but this has little effect on the comparison due to the small energy dependence of these ratios in the

² The diffusion coefficient, adjusted to fit B/C, differs slightly from that used in the original work for the same z_h (SM98), reflecting the more detailed treatment and updated cross sections.

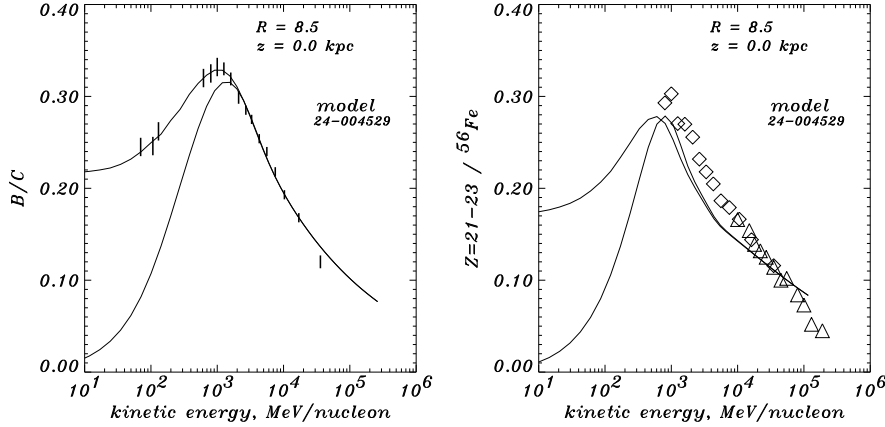


Figure 1. Left: B/C interstellar and modulated to 500 MV for diffusive reacceleration model with $z_h = 4$ kpc. Data compilation: Webber et al. (1996). Right: The same for sub-Fe/Fe. Data: $\diamond$ – Engelmann et al. (1990), $\triangle$ – Binns et al. (1988).

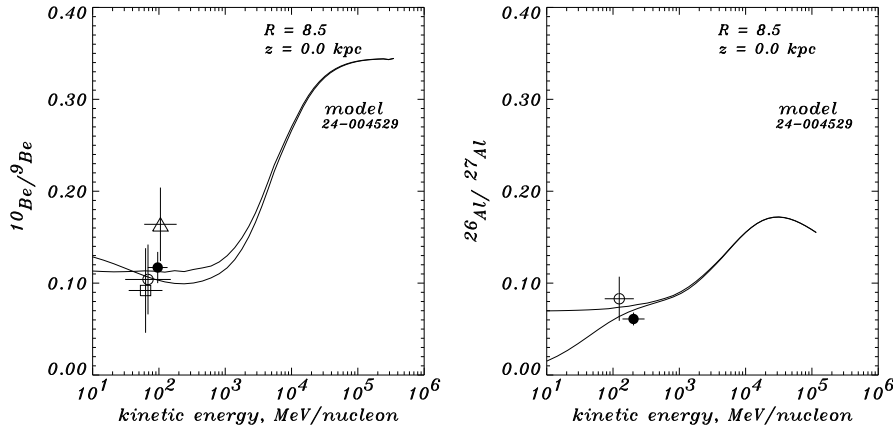


Figure 2. Model interstellar and modulated (500 MV) ratios. Left: ¹⁰Be/⁹Be. Data from Lukasiak et al. (1994a) ($\square$ – Voyager-1,2, $\circ$ – IMP-7/8, $\triangle$ – ISEE-3) and Connell (1998) ($\bullet$ – Ulysses). Right: ²⁶Al/²⁷Al. Data: $\circ$ – Lukasiak et al. (1994b), $\bullet$ – Simpson and Connell (1998). Note that the data points shown are at the measured (not interstellar) energies.

100–1000 MeV/nucleon range. In SM98 we obtained a range $4 \text{ kpc} < z_h < 12 \text{ kpc}$ for the halo height; in the present improved model the ¹⁰Be/⁹Be and ²⁶Al/²⁷Al predictions are consistent with this.

Recently, Webber and Soutoul (1998) and Ptuskin and Soutoul (1998) have obtained $z_h = 2\text{--}4 \text{ kpc}$ and $4.9^{+4}_{-2} \text{ kpc}$, respectively, and our results are consistent with these.

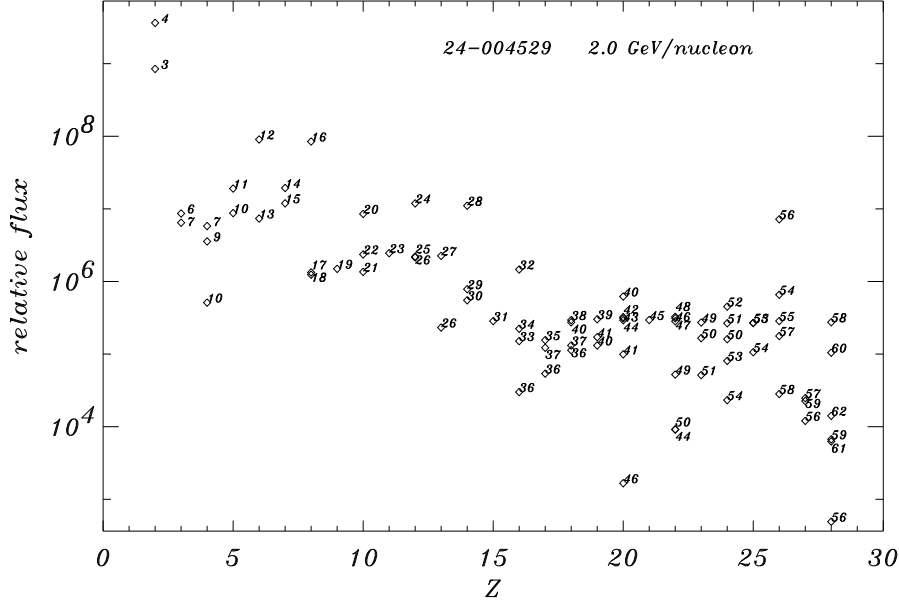


Figure 3. Model isotopic fluxes at 2 GeV/nucleon (SM99b) as function of Z ; individual A values are marked.

Fig. 3 shows computed fluxes of all the included isotopes. This result is illustrative of the method but not to be taken as predictions for evaluation purposes.

3. Probes of the Interstellar Nucleon Spectrum: Diffuse Continuum γ -rays, Antiprotons and Positrons

Secondary e^+ 's and $\bar{p}$'s in Galactic CR and some part of the diffuse Galactic γ -rays are produced in collisions of CR particles with interstellar matter³. Because they are secondary, they reflect the *large-scale* nucleon spectrum independent of local irregularities in the primaries and thus provide an essential check on propagation models and also on the interpretation of diffuse γ -ray emission (MS98, MSR98, SMR99). These are an important diagnostic for models of CR propagation and provide information complementary to that provided by secondary nuclei. However, unlike secondary nuclei, $\bar{p}$'s and e^+ 's reflect primarily the propagation history of the protons, the main CR component.

³ Contributions from possible nearby source(s) of positrons (e.g., Aharonian et al., 1995) and WIMP annihilation (e.g., Bottino et al., 1998; Baltz and Edsjö, 1998; MS99) are also discussed.

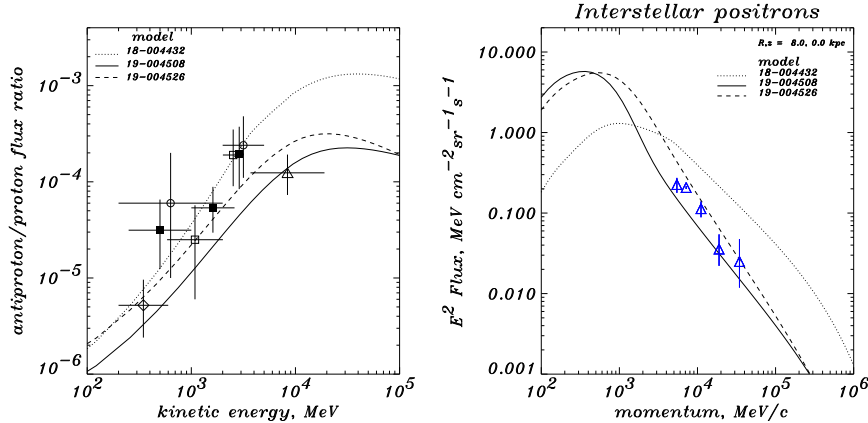


Figure 4. Left: Interstellar $\bar{p}/p$ ratio for different ambient proton spectra (MSR98, SMR99) compared with data. Solid line: “conventional”, dotted line: “hard nucleons”, dashed line: “best model”. Data (direct measurements): see references in MSR98. Right: Interstellar spectra of e^+ ’s for different ambient proton spectra (SMR99) compared with data. Lines are coded as on the left. Data (direct measurements): Barwick et al. (1998).

The most direct probe of the interstellar proton spectrum is perhaps provided by diffuse γ -rays, but an essential and *a priori* unknown part of the emission is produced by CR electrons via IC scattering. The latter depends on many details of propagation in the Galaxy as well as distributions of the magnetic and radiation fields. Moreover, because of large electron energy losses the average electron spectrum in the Galaxy can differ substantially from what is measured locally.

Recent results from both COMPTEL and EGRET indicate that IC scattering is a more important contributor to the diffuse emission than previously believed. The puzzling excess in the EGRET data > 1 GeV relative to that expected for π^0 -decay has been suggested to originate in IC scattering from a hard interstellar electron spectrum (e.g., Pohl and Esposito, 1998; SM99a), or from a harder average nucleon spectrum in interstellar space than that observed directly (e.g., Mori, 1997). Our combined approach allows us to test these hypotheses (SMR99).

Our calculations show that the suggestion of a hard nucleon spectrum provides better agreement with EGRET measurements, but conflicts with data by producing too much $\bar{p}$ and e^+ (Fig. 4). The hard electron spectrum hypothesis looks more plausible but still the agreement with γ -ray data is not too good.

Our best model so far includes the electron injection spectral index -1.8 , which after propagation with reacceleration provides consistency with radio synchrotron data (a crucial constraint). Following Pohl and

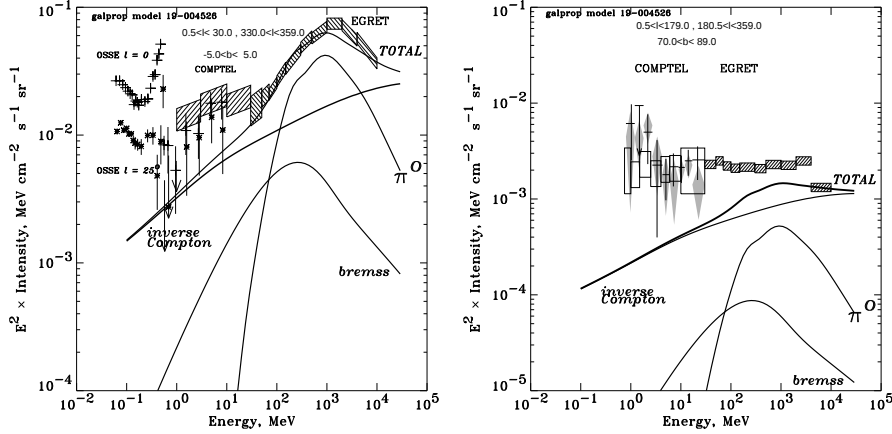


Figure 5. *Left:* Gamma-ray energy spectrum of the inner Galaxy ($300^\circ \leq l \leq 30^\circ$, $|b| \leq 5^\circ$) compared with our best model calculations ($z_h = 4$ kpc). Curves show the contribution of IC, bremsstrahlung, and π^0 -decay, and the total. Data: EGRET (Strong and Mattox, 1996), COMPTEL (Strong et al., 1999), OSSE ($l = 0, 25^\circ$: Kinzer et al., 1999). *Right:* Energy spectrum of γ -rays from high Galactic latitudes ($|b| \geq 70^\circ$, all longitudes). Data: see references in SMR99.

Esposito (1998), for this model we do *not* require consistency with the locally measured electron spectrum above 10 GeV since the rapid energy losses cause a clumpy distribution so that this is not necessarily representative of the interstellar average. For this case, the interstellar electron spectrum deviates strongly from that locally measured, and also the nucleon spectrum at low energies is slightly modified to obtain an improved fit to the γ -ray data. Because of the increased IC contribution at high energies, the predicted γ -ray spectrum can reproduce the overall intensity from 30 MeV – 10 GeV (Fig. 5) (SMR99).

Our calculations of the antiproton/proton ratio and spectra of secondary e^+ 's for this model (with reacceleration) are shown in Fig. 4. The predictions are larger than the conventional model, in which the electron and nucleon spectra are adjusted to agree with local measurements, but are still consistent with the $\bar{p}$ and e^+ measurements. The analysis of the latitude and longitude γ -ray distributions shows that such a model with large IC component can indeed reproduce the data (SMR99).

None of our models fits the γ -ray spectrum below ~ 30 MeV as measured by the Compton Gamma-Ray Observatory (Fig. 5). This is the consequence of our requirement to be consistent with synchrotron data. In order to fit the low-energy part as diffuse emission, without violating synchrotron constraints (SMR99), requires a rapid upturn in the CR electron spectrum below 200 MeV. However, in view of the

energetics problems (Skibo et al., 1997), a population of unresolved sources seems a more probable origin for the emission and would be the natural extension of the low energy plane emission seen by OSSE (Kinzer et al., 1999) and GINGA (Yamasaki et al., 1997).

References

- Aharonian, F.A., Atoyan, A.M. and Völk, H.J.: 1995, *A&A* **294**, L41
 Baltz, E.A. and Edsjö, J.: 1998, *Phys. Rev. D* **59**, 023511
 Barwick, S.W., et al.: 1998, *ApJ* **498**, 779
 Binns, W.R., et al.: 1988, *ApJ* **324**, 1106
 Bottino, A., et al.: 1998, *Phys. Rev. D* **58**, 123503
 Connell, J.J.: 1998, *ApJ* **501**, L59
 DuVernois, M.A. and Thayer, M.A.: 1996, *ApJ* **465**, 982
 Engelmann, J.J., et al.: 1990, *A&A* **233**, 96
 Kinzer, R.L., Purcell, W.R. and Kurfess, J.D.: 1999, *ApJ* **515**, 215
 Lukasiak, A., et al.: 1994a, *ApJ* **423**, 426
 Lukasiak, A., et al.: 1994b, *ApJ* **430**, L69
 Mori, M.: 1997, *ApJ* **478**, 225
 Moskalenko, I.V. and Strong, A.W.: 1998, *ApJ* **493**, 694 (MS98)
 Moskalenko, I.V., Strong, A.W. and Reimer O.: 1998, *A&A* **338**, L75 (MSR98)
 Moskalenko, I.V. and Strong, A.W.: 1999, *Phys. Rev. D*, in press (MS99)
 Pohl, M. and Esposito, J.A.: 1998, *ApJ* **507**, 327
 Ptuskin, V.S. and Soutoul, A.: 1998, *A&A* **337**, 859
 Seo, E.S. and Ptuskin, V.S.: 1994, *ApJ* **431**, 705
 Simpson, J.A. and Connell, J.J.: 1998, *ApJ* **497**, L85
 Skibo, J.G., et al.: 1997, *ApJ* **483**, L95
 Strong, A.W. and Mattox, J.R.: 1996, *A&A* **308**, L21
 Strong, A.W. and Moskalenko, I.V.: 1998, *ApJ* **509**, 212 (SM98)
 Strong, A.W. and Moskalenko, I.V.: 1999a, In Ramaty, R., et al., editors, *Proc. Workshop LiBeB, Cosmic Rays and Gamma-Ray Line Astronomy, ASP Conf. Ser.* **171**, 162, Astron. Soc. Pacific (SM99a)
 Strong, A.W. and Moskalenko, I.V.: 1999b, *26th ICRC (Salt Lake City)*, OG 3.2.18 (SM99b)
 Strong, A.W., Moskalenko, I.V. and Reimer O.: 1999, *ApJ*, submitted, astro-ph/9811296 (SMR99)
 Strong, A.W., et al.: 1999, *Astroph. Lett. Comm.*, in press
 Webber, W.R.: 1997, *Spa. Sci. Rev.* **81**, 107
 Webber, W.R. and Soutoul, A.: 1998, *ApJ* **506**, 335
 Webber, W.R., Kish, J.C. and Schrier, D.A.: 1990, *Phys. Rev. C* **41**, 566
 Webber, W.R., et al.: 1996, *ApJ* **457**, 435
 Yamasaki, N.Y., et al.: 1997, *ApJ* **481**, 821